



Description	Value
<b>General information:</b>	
Product name:	SCALA2 3-45
Product No:	<a href="#">93013252</a>
EAN number:	5715122954975
Price:	EUR 1069
<b>Technical:</b>	
Rated flow:	3 m <sup>3</sup> /h
Maximum flow:	4.6 m <sup>3</sup> /h
Rated head:	27 m
Maximum head:	45 m
Primary shaft seal:	Carbon/Ceramic
Approvals:	CE, VDE, MORO, UKCA, KC, SEPR O, AAA
Approvals for drinking water:	KIWA, WRAS, ACS
Curve tolerance:	ISO9906:2012 3B
Model:	2
Max. pump speed:	5200 rpm
<b>Materials:</b>	
Pump housing:	Composite NORYL FE1630PW PPE+PS-GS30
Impeller:	Composite NORYL FE1630PW PPE+PS-GS30
Material code:	A
<b>Installation:</b>	
Range of ambient temperature:	0 .. 55 °C
Maximum operating pressure:	10 bar
Maximum permissible inlet pressure:	6 bar
Pipe connection standard:	EN 10226-1
Type of inlet connection:	R
Type of outlet connection:	R
Size of inlet connection:	1 inch
Size of outlet connection:	1 inch
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	0 .. 45 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input P1:	550 W
Rated power - P2:	0.45 kW
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 200-240 V
Minimum current consumption:	0.01 A
Maximum current consumption:	2.8 A
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	F
Length of power cable:	1.5 m
Power plug:	Schuko plug
<b>Controls:</b>	
Type of connector:	Type E/F (CEE7/7)
<b>Others:</b>	
Net weight:	9.8 kg
Gross weight:	12.1 kg
Shipping volume:	0.043 m <sup>3</sup>
Sales region:	Europe
Storage temperature range:	-40 .. 70 °C

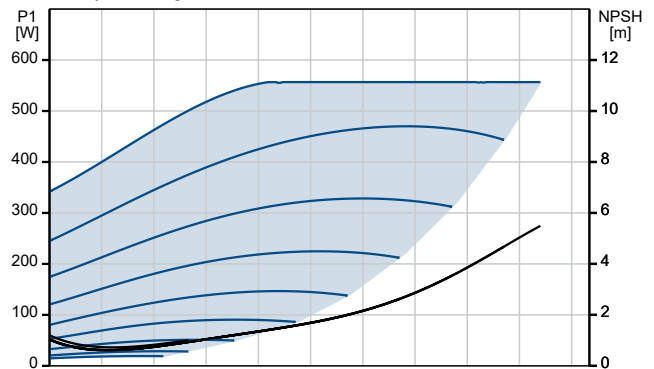

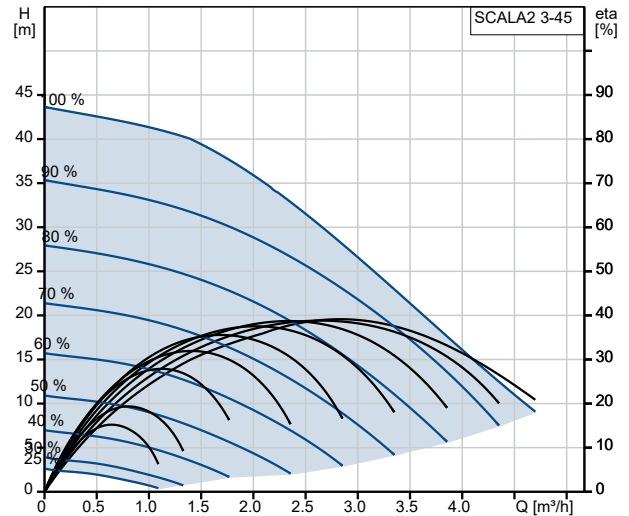

Company name:

Created by:

Phone:

Date:

22/09/2025

Description	Value
Danish VVS No.:	385183245
Swedish RSK No.:	5854027
Finnish LVI No.:	4732548
Norwegian NRF no.:	1365593
Country of origin:	RS
Custom tariff no.:	84137075